

METHODOLOGY FOR IMPROVING THE EFFICIENCY OF PAPER PRODUCTION AT THE PRODUCTION FACILITIES OF UKRAINIAN ENTERPRISES

Stepan Pakizh

Lviv Polytechnic National University, Lviv, Ukraine

stepan.p.pakizh@lpnu.ua

<https://doi.org/10.23939/jcpee2024/01/025>

Abstract: This paper highlights the current state of paper production under the existing conditions of energy supply in Ukraine. Paper and cardboard production is an energy-intensive process. The author presents ways to solve the problem of backup power and steam supply to the enterprises, as well as shows the complexity of electronic control, regulation of paper or paperboard web tension between electric drives with the possibility of their precise correction and, accordingly, web movement from drive to drive, and their dependence on high-quality and reliable power supply.

Key words: paper machine, gluing presses, paper calendering, drying cylinders, electricity and steam supply, transformer substation, turbine generators, automatic control system.

Introduction

There are major differences between paper mills, such as the use of raw materials and their grades, but the typical processes are similar across all mills (Fig. 1).

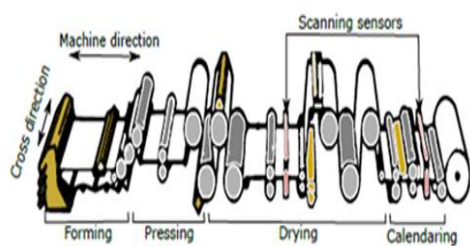


Fig. 1. Schematic diagram of the Fourdrinier paper machine.

The paper and pulp industry utilizes about 6% of the world's total industrial energy consumption, being the fourth largest consumer of industrial energy in the world.

In 2024, there are 19 companies operating in the paper industry in Ukraine.

Raw materials used by these companies are primary pulp and recycled paper.

Before the primary pulp or recycled paper pulp enters the paper machine, some processing steps are necessary, which include the process of pulp preparation, including fibre disintegration, cleaning, as well as storage and mixing steps, which are adapted to each other.

During the preparation of recycled paper and pulp, they must be cleared of impurities, plastics and adhesives. Some types of paper made from primary fibres require a refining step to improve the properties of the fibre. Refining is carried out in refiners. The operation order of the preparation of raw material may vary from mill to mill, and some steps may be repeated.

After the pulp has passed all the necessary stages of the pulping process, it is poured onto a sieve. At this stage, most of water is removed by gravity and vacuum. The paper pulp on the screen is dehydrated by filtering. The rate of dehydration of the paper pulp affects the quality of the finished paper, for example, an increase in the dehydration rate leads to a deterioration in paper quality.

Dehydration of raw paper to the extent 30–40 % takes place in the press section through mechanical extraction of moisture using presses of various design. During the paper passage through the presses, the moisture content in the paper is further reduced and compacted, which leads to a reduction in porosity and improvement of physical and technical characteristics.

The paper is dried in the drying section of the machine. Here, the paper is finally dehydrated and brought to the moisture content specified by the standards for each type of paper. In addition to final dehydration, the drying process also involves gluing the paper by the hydrophobisation of substances added to the paper pulp. The temperature regime of drying significantly affects the properties of paper (Fig. 2).

The paper is dried by convection. During the contact, the heat from the solid surface of the cylinders heated from the inside by hot steam is directly transferred to the wet pulp web. The temperature of the drying cylinders which inside is supplied with steam depends on the type of paper and does not exceed 180 °C.

This method of drying is quite economical and allows for achieving high paper quality, namely the absence of warping and increased smoothness. The drying cylinders are heated by superheated steam supplied at a pressure of 0.5–1.0 MPa and a temperature of 120–165 °C.

Convective drying is used to intensify the paper drying process [6].

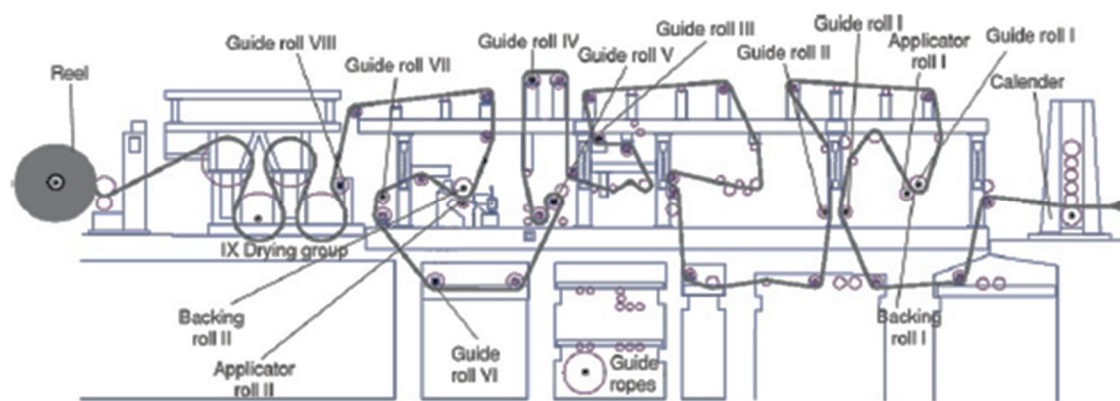


Fig. 2. Schematic diagram of the drive in the paper machine section.

Convective drying is used to intensify the paper drying process. The use of high-speed drying hoods allows for a higher degree of dehydration compared to contact drying. In the case of the collective drying method, the paper is dried with heated air.

The technological processes of dehydrating, pressing and drying paper web complement each other. Drying paper is 10–12 times more expensive than pressing and 60–70 times more expensive than screen dehydration. At the final stage of paper production, a number of operations are carried out to improve its consumer properties.

Paper is glued to improve the density of its structure, increase its strength, smoothness and water resistance. The most common method of surface gluing is the use of gluing presses. Gluing presses consisting of two shafts are installed in the part of the machine where the dryness of the web reaches approximately 85–94 % and consist of two shafts. After gluing, the paper is dried.

Paper is calendered to ensure its tensile strength, or to make it soft and bulky, which is very important for sanitary, packaging and other types of paper. At the final stage paper is calendered on special calendering devices or directly on the paper machine.

The final step in the paper production process is rolling or cutting the paper into sheets of a certain size. The paper is then labelled and packaged.

An important structural element of the paper machine is an electric drive, which consists of motors, frequency converters and switching equipment, control panels with the integration of additional functions for controlling section speeds and serial input activating.

The automation system of the equipment includes a programmable logic controller with software, input/output module for digital and analogue signals, and a network controller of digital data transfer.

The electric drive of the paper machine is selected basing on the analysis of characteristics of the working

machine, taking into account the following operating features: environmental dependence, high humidity, and the presence of chemically active substances.

A variety of conductive characteristics of working elements is taken into account when selecting electrical modifications of motors and analysing transient processes of the motor-working part of the machine.

The choice of an electric drive for a working machine is based on its drive characteristics, which include: technological, kinematic, inertial, mechanical, load, and energy characteristics. The analysis of the technological characteristics makes it possible to formulate requirements for the electric drive control circuit (necessary interlocks, angular speed control, protection against possible emergency shutdowns, etc.) and select an electric motor according to the environmental conditions.

When designing an electric drive, the coefficient of inertia of the motor-working part of the machine is used. The mechanical characteristics of the working parts of the machine make it possible to select electric motors according to their starting properties.

In recent years, when installing new paper machines and upgrading existing ones, there has been a trend towards the widespread use of variable frequency drives using asynchronous motors as the simplest, cheapest and most reliable electric drive that does not require special operating conditions or constant maintenance.

A variable frequency drive is a complex electro-mechanical system that, in addition to an induction motor, also includes a frequency converter (FC) and an automatic control system (ACS).

The paper manufacturing process requires the creation of a certain amount of tension. In the wet part of the machine (screen, presses), tension is created to remove the paper from one part and transfer it to the next section. In the drying groups and the final part of the machine, the paper must have some tension to avoid creasing. Therefore, tension control is one of the key conditions for paper production



Fig. 3. Paper machine

The tension of the paper web in the inter-sectional spaces of the machine is created by the speed difference between the compatible sections, which is maintained with great accuracy by the automatic speed ratio control system, and the automatic control system is also used to compensate for process deviations in tension and maintain it at the desired level.

All existing tension control systems are closed-loop stabilisation systems and maintain tension with high statistical and dynamic accuracy. The main task of the electric drive system is to regulate the tension and elongation under the condition of various technological factors and external disturbances and to ensure uninterrupted operation of the machine.

Analysis of the current state of maintaining constant electricity and steam supply and functioning of control systems at paper mills.

Paper and board production requires a large amount of energy. Electricity consumption per machine ranges from 3 MW to 8 MW per hour. Process steam consumption is up to 15 tonnes per hour. Converting and cartoning machines require highly sophisticated electronic control. The speed setpoint must be maintained at a precise level, all drives must be synchronised and the speed cascaded from drive to drive, with precise correction. In addition, the tension of the sensors must be controlled between the drives in the part of the production line where the web is formed, and the tension of the board must be controlled and the load distributed. Force sensors are commonly used in the process. Any fluctuation in the voltage frequency in the alternating-current mains leads to a paper web break. Therefore, all the effort spent at the initial stage of pouring the mass onto the sieve table and guiding the paper web to the roll would be wasted as well as all energy expenditure at this level. In this case, the paper machine has to be stopped, the paper stock has to be

removed at all production stages and the stock has to be fed from the pressure box onto the screen again.

In Ukraine, neither of paper mills has their own electricity generation, which makes them dependent on high-quality, reliable electricity supply. The analysis of the volume of paper production in Ukraine (Table 1) has revealed that in 2020–2023 there will be a significant decrease in manufacturing the paper products.

Table 1

Statistics on the volume of production of domestic cardboard and paper products

Year	Production		
	Paper, thousand tons	Cardboard, thousand tons	Corrugated box, million sq m
2020	155.3	662.8	710.5
2021	161.5	735.4	754.8
% 2021 compared with 2020	104.0	111.0	106.3
% 2021 compared with 2021	100	100	100
2022 (24.02.beginning of the war)	121.8	399.6	443.0
% 2022 compared with 2021	75.4	54.3	58.7
2023	110.4	467.9	529.4
% 2023 compared with 2021	68.4	63.6	119.5
% 2023 compared with 2022	90.6	117.1	70.1

There are various factors that influence this process. One of the most important factors is a stable and reliable power supply to the consumer. At the existing paper mills. steam is produced directly at the production site. while some consumers buy it from other consumers. All paper

mills are supplied with electricity exclusively from the Ukrainian power grid (Fig. 4).

To solve this problem, we propose to build a CHP plant (Fig. 5, proposed scheme) directly at the paper mill.



Fig. 4. Electricity supply scheme of enterprises.

To solve this problem, we propose to build a combined heat and power plant (CHPP) (Fig. 5, proposed scheme) directly at the paper mill.

The CHPP should provide combined heat and power to an industrial enterprise. Depending on the needs, the CHPPs are equipped with special types of steam turbines of T, PT and R types. The project should provide the necessary capacity of steam boilers and turbine generators to cover 100 % of the paper mill needs for process steam and electricity production. This will make it possible to be independent of emergencies in the energy market. Wood or coal should be the main fuel for paper boilers. Gas should be the backup fuel. This will make it possible to choose the type of fuel depending on its availability and price on the market. The steam capacity of the boiler is selected depending on the choice of an electric generator and the amount of process steam the paper machines need.

A steam turbine with a generator should be selected depending on the installed capacity of the consumer.

Each turbine is matched to a specific type of the generator. Turbines and generators are matched on a power scale. When choosing a turbine, it should also be born in mind that process steam with a pressure of 0.3–0.5 MPa is used for paper drying. Therefore, a turbine should be selected with condensation, industrial and heat recovery (PT type), taking into account that the heat load should also be provided for ventilation and heating of production facilities. Heating and ventilation and other domestic needs are usually supplied with hot water with a temperature of 70 °C to 180 °C.

The combined generation of electricity and heat will significantly improve the efficiency of the power plant by reducing heat loss in the turbine condensers.

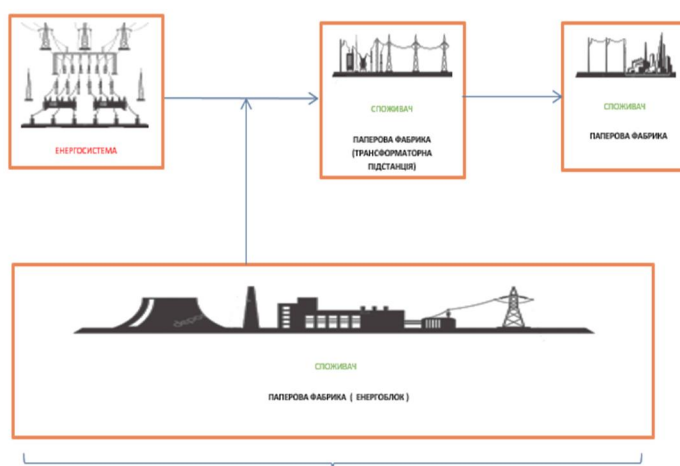


Fig. 5. Proposed scheme for modernising electricity consumption with building of separate power block and possibility of operation in autonomous mode using own power source.

Structurally, they are made according to the modular layout principle in the size of a standard container (Fig. 6).

The module has electric capacity of 6 MW, and if necessary, the installed electric capacity can be increased to 25–30 MW. It should be noted that the modernisation

proposal does not affect the existing equipment at the existing plant. On the free territory near the boiler house and substation of the enterprise, turbine modules operating on steam obtained from an organic coolant are installed. They are delivered to the construction site in full

factory readiness, which significantly reduces the time for installing electrical equipment. The modular device allows the installed capacity to be increased to meet the needs of the consumer.

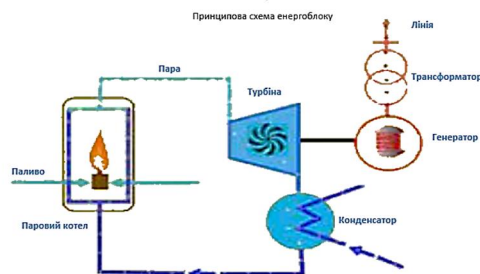


Fig. 6. Operation flowchart of the power unit.

Conclusions:

The construction of CHP plants will make it possible to reliably supply enterprises with electricity and steam.

The creation of new industrial steam and electric power plants opens up the possibility of optimising the parameters of interacting heat flows and the selection of organic coolant.

When implementing the above proposals to improve the reliability of the energy supply of the enterprise, the construction of a CHP plant does not affect the existing energy supply at the enterprise. This energy supply scheme will be both technologically and economically beneficial regardless of the state of external networks (electricity, steam, gas supply).

References

- [1] Thermal Energy – New Challenges of the Time / Edited by P. Omelianovskiy. Y. Mysak. Lviv: SPF “Ukrainian Technologies”. 2009. 660 p. (in Ukrainian).
- [2] A. I. Zhuchenko. M. S. Pirgach. M. Z. Kvasko Automatic control of pressure boxes of paper and cardboard machines 2014. 232 p. (in Ukrainian).
- [3] Akesson J. J. Ekvall. Parameter Optimization of a Paper Machine Model Proceedings of Reglermöte. Stockholm. 2006. pp. 45–51.
- [4] Radha R. Basavaraj V. Automation of Sectional Drive Paper Machine Using PLC and HMI. International Journal of Engineering Research and General Science. 2015. No 3(Issue 4). pp. 842–847. <http://pnrsolution.org/Datacenter/Vol3/Issue4/108.pdf>
- [5] Kulinchenko V. R. Shevchenko O. Y. Piddubnyi V. A. Heat transfer with elements of mass transfer (theory and practice of the process): textbook K.: Phoenix. 2014. 918 p. (in Ukrainian).

- [6] On identification and control tuning of cylinder dryers / O. Slätteke. K. Forsman, T. Hägglund, B. Wittenmark. // In Proceedings Control Systems 2002. 2002. pp. 298–302.
- [7] Ghosh A. Optimization of paper machine dryer section // Proc. of 7th Int. Conf. on Pulp. Paper and Conversion Ind.. New Delhi. 2005 pp. 45–49.
- [8] Talja R. Some aspects of the combined contact-impingement drying of paper / R. Talja. O. Timofeev. J. Keränen. N. Milosavljevic // Int. Conf. “Resource-and energy saving in the pulp and paper industry and municipal economy (process. equipment. Automation)”. SPb: State Technological University of Plant Polymers. 2005. pp. 237–242.
- [9] Zhuchenko A. I. Cherepkin E.S. Calculation of heating of paper web. Bulletin of the National Technical University of Ukraine “KPI” Series “Chemical Engineering. Ecology and Resource Conservation”. K.: NTUU KPI. 2014. No. 2 (13). P. 104–110 (in Ukrainian).

МЕТОДИКА ПІДВИЩЕННЯ ЕФЕКТИВНОСТІ ВИРОБНИЦТВА ПАПЕРОВОЇ ПРОДУКЦІЇ НА ВИРОБНИЧИХ ПОТУЖНОСТЯХ ПІДПРИЄМСТ УКРАЇНИ

Степан Пакіж

У статті висвітлено сучасний стан виготовлення паперової продукції в нинішніх умовах енергозабезпечення в Україні. Наведено способи вирішення резервного забезпечення паперових підприємств електроенергією і паром. підкреслено складність електронного керування, регулювання сили натягу полотна між електроприводами з можливістю їх точної корекції та переміщення від приводу до приводу. а також їх залежність від енергопостачання.



Pakizh Stepan – PhD student of the Department of Electromechanics and Computerised Electromechanical Systems of the Institute of Power Engineering and Control Systems. Speciality – electric and power engineering electromechanics

Received: 18.08.2024 Accepted: 30.09.2024

ORCID ID: 0009-0008-2092-5226